




First, mark the hole in the ceiling, then insert the expansion screw into the ceiling, then use the self-tapping screw to fix the ceiling.

1

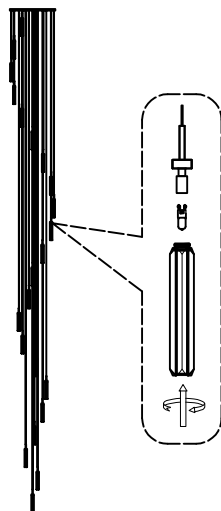

As shown in the picture, first insert the bulb into the lamp cap and then lock the lamp shade.

2



As shown in the picture on the right, connect the main line to the power cord on the ceiling (Note: When connecting, the main switch should be closed), then lock the suction top plate on the panel and turn the main switch on to test the power.




3



Installation complete.

4

Model: 4528+14/S

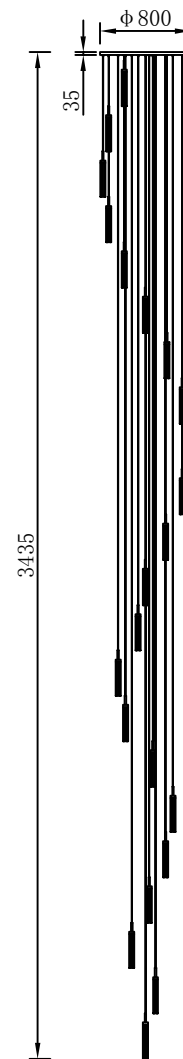

Safety precautions:

1. The power do not exceed the prescribed range (rated voltage AC220-240V 50Hz).
2. Please cut off the power supply while replacing the light source and other maintenance operation .
3. The plate fixed on the ceiling must be able to withstand the weight more than 3 times of the object.
4. After installation is complete, check the glass right or not? If it is damaged, it should be replaced immediately.